


PLAN VIEW

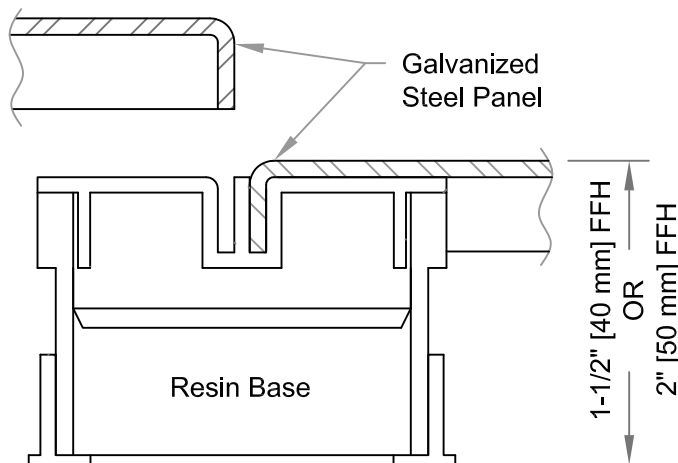

SIDE VIEW

PHYSICAL DATA

- Weight of system - 3.7 psf (18.1 kg/m<sup>2</sup>)
- Height of system - 1-1/2" (40 mm)  
2" (50 mm)
- Fire rating of bare panel:  
Class A Flame Spread  
Non-Combustible Materials

PERFORMANCE DATA

- Concentrated Live Load - 2,000 lbf (8.90 kN)  
Per IBC Table 1607.1
- Concentrated Point Load - 500 lbf (2.22 kN)  
Per CISCA Test Procedures, Section 1
- Uniform Live Load - 2,000 lbf (8.90 kN)  
Per IBC Table 1607.1
- Ultimate Load Safety Factor - 2-to-1 Min.  
Per CISCA Test Procedures, Section 2
- Rolling Loads - 10 Pass  
CISCA Wheel A (3" Dia.) - 460 lb.  
8" Dia. x 2" Semi-Pneumatic - 500 lb.

FINISH OPTIONS

- Bare surface galvanized steel

FEATURES

- Available at 1.5" FFH or 2.0" FFH
- Prefabricated before shipment
- Easy to install
- Heavy-Duty quick-connect steel plates
- Easy to change layout and cable wiring
- No adhesive required
- No underlayment required
- No fasteners required